

# Phiveo™ Collection

## Sunlike LED Tape & Strip Light Specification Sheet




### KEY HIGHLIGHTS

Sunlike LED Strips are equipped with innovative Unlike full-spectrum LEDs, which have a CRI value of almost 100 and whose light spectrum no longer have any gaps. The complete color spectrum, which is comparable to sunlight, reproduce colors in a particularly realistic manner and even the smallest color nuances can be reliably assessed.

### SPECIFICATIONS

- 12VDC and 24VDC. 5VDC optional.
- 2700K, 3000K, 3500K, 4000K, 5000K and 6000K color temps.
- Maximum run on a given lead is 5 meters (16' -4") @12V and 10 meters (32'-8") @24V.
- Dry location.
- 120 LEDs per meter.
- Cuttable every 2" (51mm), or every 3LEDs (12V) / every 6/7/8LEDs (24V).
- Custom lengths available - factory customization.
- Compatible with solder-free connectors.
- Premium diodes 120° viewing angle.
- Dimmable.
- 3M adhesive back.
- 95+ CRI and 95+ R9.
- Up to 1900+ lumens per meter.

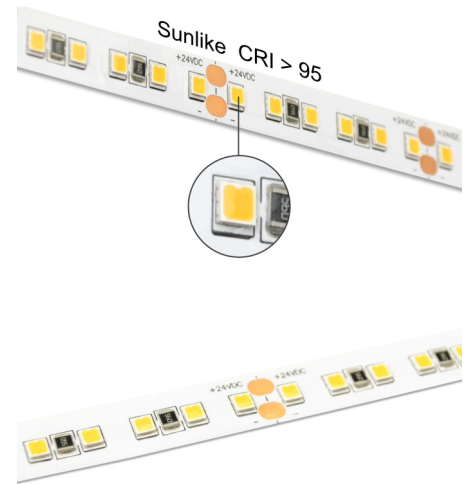

### FEATURES

- ETL, CE, RoHS, CCC certified.
- CA Title 24: Compliant with approved drivers; consult factory for details.
- Operating Temperature: -20°C to 50°C (-4°F to 122°F)
- Storage Space Ready: Complies with NEC (NFPA 70) 410.16 requirements for closet installations.



### WARRANTY

- 5-year coverage guaranteed when utilized with luzumi led approved power supply.

Note: The Warranty Period begins on the date of original shipment from our factory, the warranty covers product only and does not cover any labor or incidental charges related to service or warranty. This Warranty applies only to the original purchasers or authorized distributors.

### HOW TO ORDER

FR28W2835SLW27K120WH10E12

Name	Wattage/m or /ft	LED Type	Category	Color Temp	LEDs/m or /ft	FPC Color	FPC Width(mm)	IP Rate	Voltage
FR	9W	2835	SL	W27K	120	WH	10	I (IP20)	12
	15W			W30K	35	BL	12	E (IP54)	24
	28W			W35K		BR			
	6W			N40K					
					C60K				

### HIGHLY RECOMMENDED EASY TO USE CONNECTORS

Part No.	Descriptions
CSS-XB2T-50	luzumi led solder-free tape to power connector
CSS-BXB2T-50	luzumi led solder-free tape to tape connector
CSS-BB2T	luzumi led tape to tape connector(no wire)
CSS-BB2T-L	luzumi led 90° Corner Connector

#### 5-Step System Builder:

- Component 1: LED Tape & Strip Light
- Component 2: Connection Hardware
- Component 3: Aluminum Channels & Lenses (Optional)
- Component 4: Dimmers/Controllers(Optional)
- Component 5: Power Supplies




## Sunlike LED Tape & Strip Light Specification Sheet

### MECHANICAL DIAGRAMS



Every 3-8 leds


Width  
0.40/0.47 in.  
(10/12 mm)




Height  
0.12 in.  
(3 mm)




120LEDs/m 10/12mm width

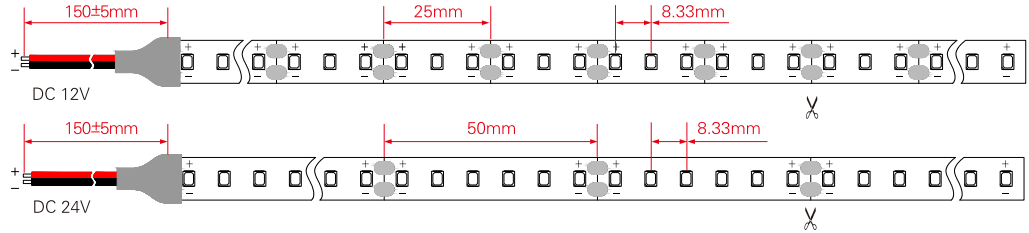



35LEDs/ft 12mm width

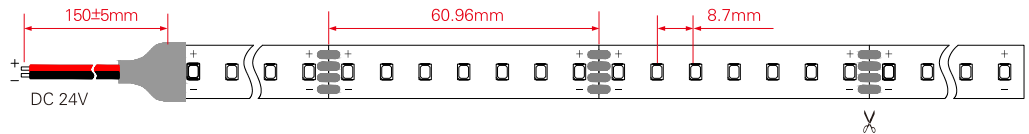

### CONNECTIONS WITHOUT USING CONNECTORS

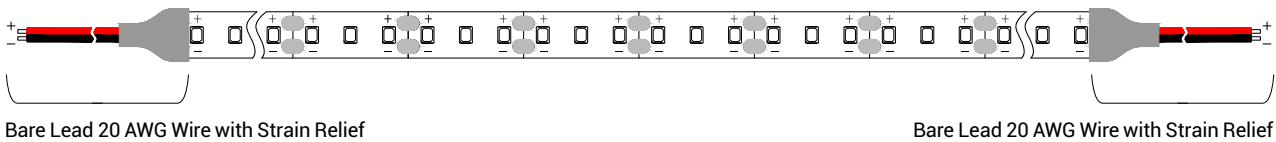

### PAIRED WITH HIGHLY RECOMMEND SOLDER-FREE EASY TO USE CONNECTORS

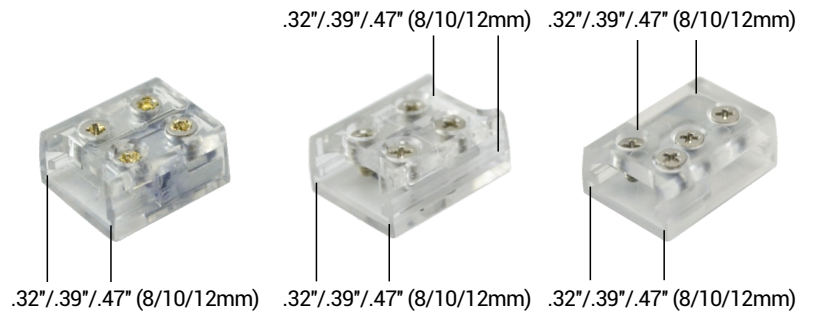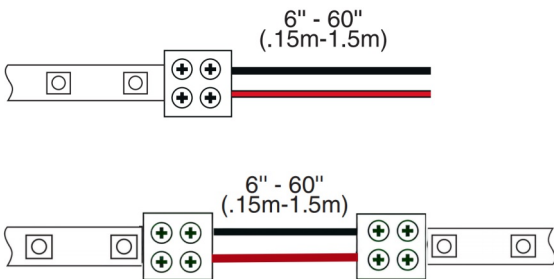

## Sunlike LED Tape & Strip Light Specification Sheet

### RECOMMENDED CHANNELS



### SURFACE MOUNTING

Part No.	Description	Included Accessories	Diffusion Type	Connection Options	Length	Diagram (mm)
LCSM1708	Sleek, low-profile design engineered for seamless tape light integration.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM0808	A master of subtlety, this minimal profile integrates seamlessly into any environment.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead only	1' to 8' (.3m -2.5m) Customizable	
LCSM1714	Engineered for structural rigidity, this robust profile adapts to diverse architectural requirements with multiple mounting configurations.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM2011SQ	A timeless, low-profile silhouette engineered for universal tape light compatibility.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM5035	A structural aluminum housing provides superior heat management and a wide, volumetric glow, perfect for high-end commercial and residential spaces.	Channel & frosted cover, 4x surface mounting clips per meter, End caps: 1x open, 1x closed. Pendant mounting kits available upon request.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector, Capable of housing multi-row LED Tape Light	1' to 8' (.3m -2.5m) Customizable	
LCSM1616SQ45	Precision-engineered angled profile designed for directed illumination.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM1616ARC45	Elegant rounded geometry meets precision optics. This specialized corner channel transforms high-density tape lights into a continuous, ethereal ribbon of light with zero hotspots.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	

## Sunlike LED Tape & Strip Light Specification Sheet

### RECOMMENDED CHANNELS



### RECESSED MOUNTING

Part No.	Description	Included Accessories	Diffusion Type	Connection Options	Length	Diagram(mm)
LCR1714	A precision-engineered recessed profile designed for seamless integration within high-end millwork. This discrete housing allows the architecture to speak while providing a flawless, flush-mounted light source.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCR3535	QUADRA 35 Structural Seamlessness Recessed Channel	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCR15050	LUZUMI™ MAXIMA 150 Recessed Channel, Commanding Scale. Infinite Light. Engineered for Grand Spaces.	Channel & frosted cover, 4x mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	

### MUD-IN

Part No.	Description	Included Accessories	Diffusion Type	Connection Options	Length	Diagram(mm)
LCMI5022-OS	Conner Mud In Channel with diffusing outside	Channel & frosted cover, 4x mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCMI5022-IS	Conner Mud In Channel with diffusing inside	Channel & frosted cover, 4x mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	