

## COB RGBW SPI Pixel LED Tape & Strip Light Specification Sheet



### KEY HIGHLIGHTS

The COB RGBW LED Pixel Strip combines ultra high-density COB (Chip-on-Board) technology with individually addressable pixel control, delivering vibrant, dynamic, and seamless lighting effects. Each pixel can be controlled independently, enabling creative color-changing patterns, animations, and visual effects. It is ideal for lighting applications where programmable, high-resolution color effects are required.

### SPECIFICATIONS

- 24VDC.
- RGBW SPI pixel.
- Maximum run on a given lead is 5 meters (16' -4") @12V and 10 meters (32'-8") @24V.
- IP20, IP67.
- 576 LEDs per meter.
- Cuttable every 3.3" (83.3mm).
- Custom lengths available - factory customization.
- Compatible with solder-free connectors.
- Premium diodes 120° viewing angle.
- Dimmable.
- 3M adhesive back.



### FEATURES

- ETL, CE, RoHS, CCC certified.
- CA Title 24: Compliant with approved drivers; consult factory for details.
- Operating Temperature: -20°C to 50°C (-4°F to 122°F)
- Storage Space Ready: Complies with NEC (NFPA 70) 410.16 requirements for closet installations.

### WARRANTY

- 5-year coverage guaranteed when utilized with luzumi led approved power supply.

Note: The Warranty Period begins on the date of original shipment from our factory, the warranty covers product only and does not cover any labor or incidental charges related to service or warranty. This Warranty applies only to the original purchasers or authorized distributors.



### HOW TO ORDER

Example: FR18WCOBRGBWSP576WH10I24

Name	Wattage/m	LED Type	Color	Control	LEDs/m	FPC Color	FPC Width(mm)	IP Rate	Voltage
FR	18W	COB	RGBW	SP	576	WH	10	I (IP20)	24
						BL		B (IP67)	

### HIGHLY RECOMMENDED EASY TO USE CONNECTORS

Part No.	Descriptions
CST10XB3T-15	luzumi led solder-free tape to power connector
CST10XB3T-15	luzumi led solder-free tape to tape connector
CST10BB3T	luzumi led tape to tape connector(no wire)


#### 5-Step System Builder:

- Component 1: LED Tape & Strip Light
- Component 2: Connection Hardware
- Component 3: Aluminum Channels & Lenses (Optional)
- Component 4: Dimmers/Controllers(Optional)
- Component 5: Power Supplies




## COB RGBW SPI Pixel LED Tape & Strip Light Specification Sheet

### MECHANICAL DIAGRAMS




Width  
0.40 in.  
(10 mm)



Height  
0.08 in.  
(2 mm)



24V 10mm width







### CONNECTIONS WITHOUT USING CONNECTORS



Bare Lead 20 AWG Wire with Strain Relief

Bare Lead 20 AWG Wire with Strain Relief

### PAIRED WITH HIGHLY RECOMMEND SOLDER-FREE EASY TO USE CONNECTORS



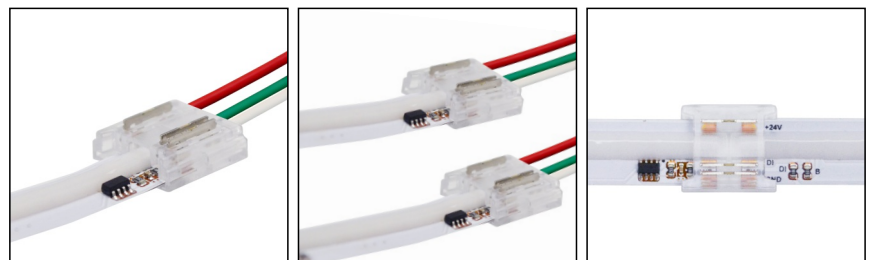
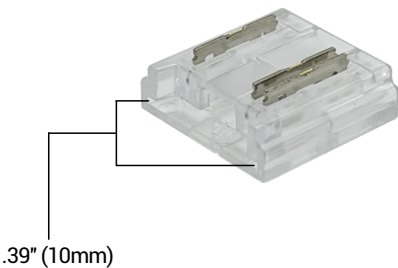
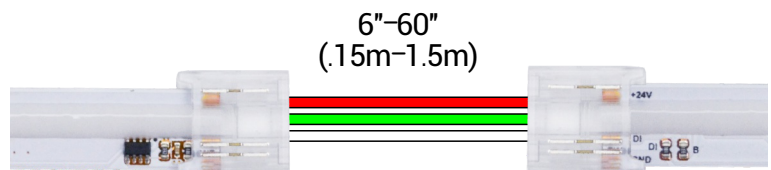
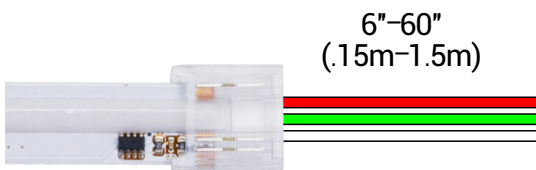


## COB RGBW SPI Pixel LED Tape & Strip Light Specification Sheet

### RECOMMENDED CHANNELS



### SURFACE MOUNTING

Part No.	Description	Included Accessories	Diffusion Type	Connection Options	Length	Diagram(mm)
LCSM1708	Sleek, low-profile design engineered for seamless tape light integration.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM1714	Engineered for structural rigidity, this robust profile adapts to diverse architectural requirements with multiple mounting configurations.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM2011SQ	A timeless, low-profile silhouette engineered for universal tape light compatibility.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM5035	A structural aluminum housing provides superior heat management and a wide, volumetric glow, perfect for high-end commercial and residential spaces.	Channel & frosted cover, 4x surface mounting clips per meter, End caps: 1x open, 1x closed. Pendant mounting kits available upon request.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector, Capable of housing multi-row LED Tape Light	1' to 8' (.3m -2.5m) Customizable	
LCSM1616SQ45	Precision-engineered angled profile designed for directed illumination.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCSM1616ARC45	Elegant rounded geometry meets precision optics. This specialized corner channel transforms high-density tape lights into a continuous, ethereal ribbon of light with zero hotspots.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	

## COB RGBW SPI Pixel LED Tape & Strip Light Specification Sheet

### RECOMMENDED CHANNELS



### RECESSED MOUNTING

Part No.	Description	Included Accessories	Diffusion Type	Connection Options	Length	Diagram(mm)
LCR1714	A precision-engineered recessed profile designed for seamless integration within high-end millwork. This discrete housing allows the architecture to speak while providing a flawless, flush-mounted light source.	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCR3535	QUADRA 35 Structural Seamlessness Recessed Channel	Channel & frosted cover, 2x surface mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCR15050	LUZUMI™ MAXIMA 150 Recessed Channel, Commanding Scale. Infinite Light. Engineered for Grand Spaces.	Channel & frosted cover, 4x mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	

### MUD-IN

Part No.	Description	Included Accessories	Diffusion Type	Connection Options	Length	Diagram(mm)
LCMI5022-OS	Conner Mud In Channel with diffusing outside	Channel & frosted cover, 4x mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	
LCMI5022-IS	Conner Mud In Channel with diffusing inside	Channel & frosted cover, 4x mounting clips per meter, End caps: 1x open, 1x closed.	Classic Frosted Lens, Dotless	Soldered Lead or Solder-free connector	1' to 8' (.3m -2.5m) Customizable	